

## 9926 Series Branch Protection Circuit Breakers

# NEW



These circuit breakers are CSA certified as branch protection devices (CSA 22.2 No. 5-02). The hydraulic - magnetic trip mechanism offers 10,000A of interrupting capacity in 120V and 240V, 50/60Hz applications.

Features include:

- 1 and 2 pole versions
- KM trip curve for general purpose applications
- 120/240V, 50/60 Hz
- up to 25A
- just 13mm wide
- mounts on 35mm DIN rail

### Canada

Weidmuller Ltd.  
10 Spy Court  
Markham, Ontario L3R 5H6  
Telephone: (800) 268-4080  
Facsimile: (905) 475-2798  
Email: [info1@weidmuller.ca](mailto:info1@weidmuller.ca)  
Website: [www.weidmuller.ca](http://www.weidmuller.ca)

### Mexico

Weidmuller, S.A. de C.V.  
Ave Ingenieros Civiles #204  
Conjunto Industrial Chachapa  
72990 Puebla, Pue. Mexico  
Telephone: (222) 286 62 47  
Facsimile: (222) 286 62 42




### United States

Weidmuller Inc.  
821 Southlake Blvd.  
Richmond, Virginia 23236  
Telephone: (800) 849-9343  
Facsimile: (804) 379-2593  
Email: [info@weidmuller.com](mailto:info@weidmuller.com)  
Website: [www.weidmuller.com](http://www.weidmuller.com)

# 9926 Series Branch Protection Circuit Breakers

## Specifications:

Voltage:	120/240V, 50/60Hz
Current:	1-25A per pole
Interrupting capacity:	10,000A
Dielectric strength:	1500V, 50/60Hz
Insulation resistance:	100MΩ
Operating life:	10000 mechanical operations
Operating temperature:	-40 to +60 deg. C
Wire size:	1-15A: 14AWG min., 10AWG max. 20-25A: 10AWG min.
Torque:	20 lb-in.
Approval:	CSA 22.2 No. 5-02, UL 489 Listed
Catalog Numbers:	

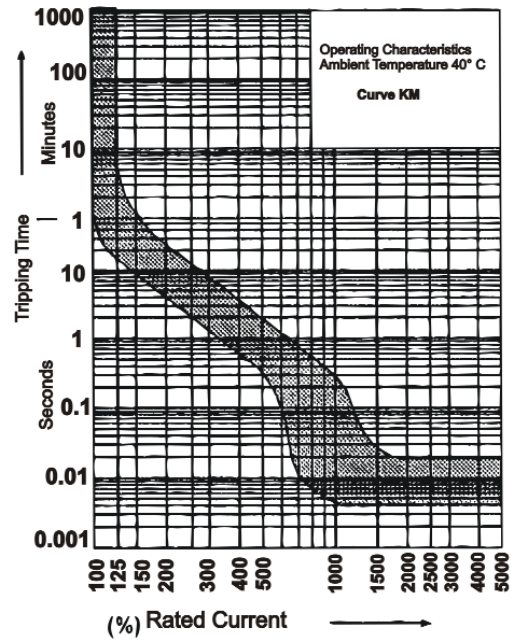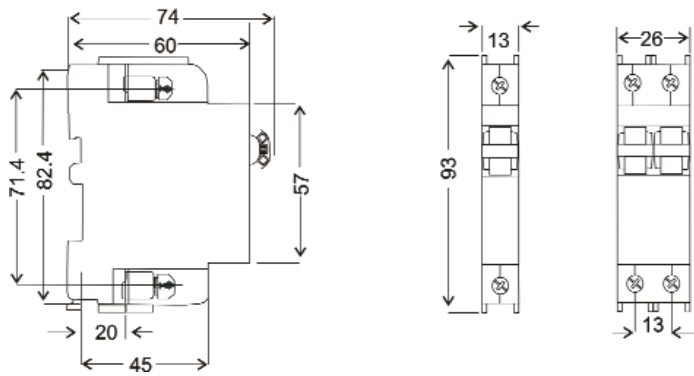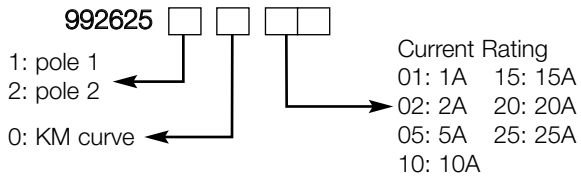

## Accessories

- Lock-out: QFAP001
- Bus-bar (54 pole): SABBM54

\* Wire sizes: gauges specified are the minimum allowable as per CSA and UL standards  
Sample trip characteristics:

	125%	150%	200%	400%	600%	800%	1000%
minimum(sec)	15	8	4	0.7	0.09	0.007	0.005
maximum(sec)	300	90	28	4	1.5	0.6	0.4

Although the 9926 series uses a magnetic only trip mechanism, CSA testing indicates a trip characteristic similar to thermal magnetic trip mechanisms. No de-rating is required at elevated temperatures.