SERIES TL 1260 SWITCHES

TACT SWITCHES - ILLUMINATED RIGHT ANGLE

SPECIFICATIONS

Contact Rating:	50mA @ 12 VDC
Life Expectancy:	50,000 cycles
Contact Resistance:	100mΩ
Insulation Resistance:	100mΩ
Dielectric Strength:	500 VAC
Actuation Force:	160 gf ± 50 gf
Operating Temperature:	-20°C to 70°C
Travel:	0.20 ±.01mm

FEATURES & BENEFITS

- Illuminated
- Right angle thru-hole tact switch
- Multiple colors available

APPLICATIONS/MARKETS

- Telecommunications
- Consumer Electronics
- Audio/visual
- Medical
- Testing/instrumentation
- Computer/servers/peripherals

HOW TO ORDER

SERIES	MODEL NO.	LED	CONTACT MATERIAL	CAP	CAP COLOR
TL	1260	R = Red G = Green Y = Yellow B = Blue	Q = Silver	R = Round	BLK =Black GRN=Green RED =Red YEL =Yellow GRY =Gray

Example Ordering Number

TL–1260–G–Q–R–BLK

Specifications subject to change without notice.

TL 1260

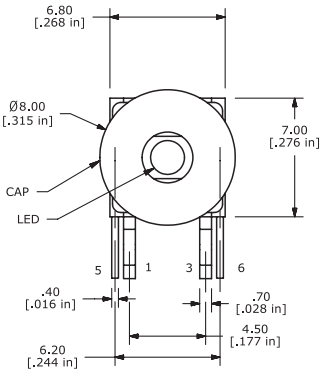

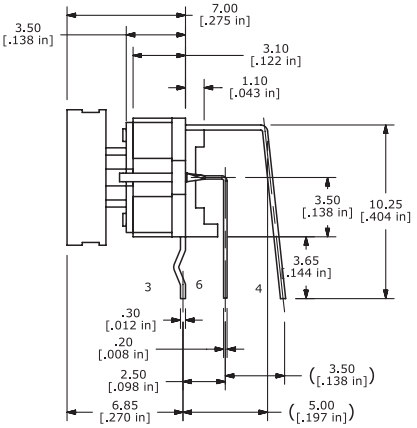



P.C. MOUNTING



SCHEMATIC

LED Specifications	Units	Blue	Green	Red	Yellow
Forward Current	mA	30	30	30	30
Forward Voltage	V	3.5-4.0	2.0-2.5	3.3-3.8	2.0-2.5
Luminous Intensity @ 20mA	mcd	230	120	50	200