


# SERIES TL 3340 SWITCHES



## TACT SWITCHES SMT - SUBMINIATURE

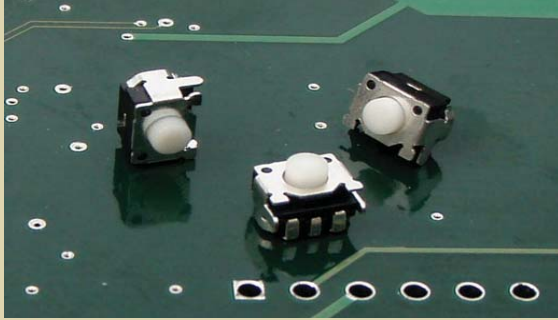

### FEATURES & BENEFITS

Reliable dome technology  
Strong tactile force  
Subminiature design  
SMT

### APPLICATIONS / MARKETS

Telecommunications  
Consumer electronics  
Audio/Visual  
Medical equipment  
Computer/servers/peripherals

### MECHANICAL SPECIFICATIONS

Mechanical Life:	100,000 cycles
Force:	160 +/- 50 grams
Travel:	0.20 +/- 0.10mm

### ELECTRICAL SPECIFICATIONS

Electrical Life:	100,000 cycles
Contact Rating:	12VDC, 50mA
Contact Resistance:	500mΩ (initial max)
Insulation Resistance:	100MΩ (Min @ 100V)
Dielectric Strength:	500VDC

### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature:	-35°C to +85°C
Storage Temperature:	-35°C to +85°C

### HOW TO ORDER:

SERIES

TL

MODEL

3340

ACTUATOR



A = 3.40mm

OPERATING FORCE



F160 = 160 grams

PLATING



Q = Silver

TERMINATION



G=Gullwing

