


## TRIM TRIO<sup>®</sup>, mixed power & signal solution



### Applications

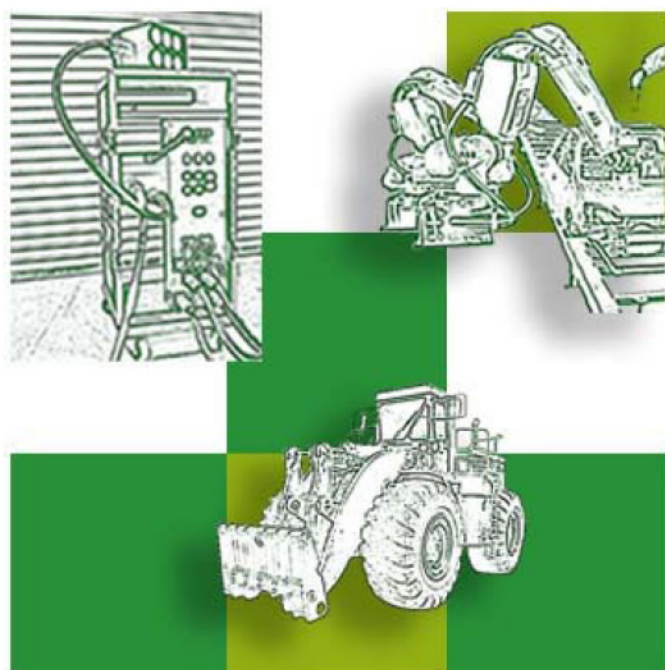

Typical applications for the UTG / UTO / UTS connectors with Mixed Power & Signal are data acquisition and power requirements in production environments, factory automation, robotics, off-road etc.

Please contact us for specific requirements

### Features & Benefits

- Mixed Power & Signal (from 5 to 44 A)  
= Flexibility with a power over signal connector
- A wide array of insert arrangements  
= Fit all customer's requirements
- Solution in metal, plastic and metal plastic for a light weight solution & high durability  
= A cost-effective connection for industrial & commercial environments
- Sealing level IP65 (UTG series) or IP68/69K Dynamic (UTO / UTS series)  
= Suitable for outdoor applications & high pressure cleaning

UTO	UTS	UTG	Layout	#20	#16	#12	#8
X	X		10-2W2	2		2	
X	X	X	10-3W3	3	3		
		X	18-7		5	2	
		X	14-8		4	4	
		X	24-7		2		7
		X	24-11		7		4

- Available in square flange & jam nut versions
- Available in jam nut versions
- Available in square flange versions

